

**Family**  
 COOKING EQUIPMENT STAR 70

**Section**  
 GAS AND ELECTRIC PASTA COOKERS

**Model**  
 NPC76G  
**Code**  
 CR0598800

## 42 LITRE SINGLE SIDE-TO-SIDE WELL GAS PASTA COOKER

Gas pasta cooker with single side-to-side well constructed in AISI 304 stainless steel. 1.5 mm thick pressed top with spillage recess and extended expansion zone. Deep drawn wells in AISI 316 polished stainless steel with radiused bottom for ease of cleaning. Water loading by means of solenoid valve activated by switch on control panel. Fast filling and top-up options. Safety guaranteed by a pressure switch, which prevents heating if well is empty. Swivelling water tap located on the rear. Heating by means of steel burner with stabilized flame complete with pilot flame and safety thermocouple. Gas supply controlled by safety valve with thermocouple, electric automatic ignition. Precise heating control by means of energy regulator. Activation of heating signalled by an indicator led on the control panel. 42-litre well capacity. Well dimensions: 510x310x275h mm Water drain tap mounted externally on the front panel. Height adjustable feet in stainless steel.



### Technical data

Width mm:	600	Internal dim. oven mm:	
Depth mm:	730	Oven capacity:	
Height mm:	870	Oven power kW:	
Weight kg.:	65.00	Qty heating zones:	1 x 14 kW
Volume m <sup>3</sup> :	0.60	Plate dim. mm:	
Power supply:	VAC230 50Hz	Dim. heating zone mm:	
Gas power kW:	14.00	Qty tank:	1
Electric power kW:	0.10	Tank dim. mm:	510x310x275h
		Tank capacity l:	42


**Family**  
COOKING EQUIPMENT STAR 70

**Section**  
GAS AND ELECTRIC PASTA COOKERS

**Model**  
NPC76G

**Code**  
CR0598800

## 42 LITRE SINGLE SIDE-TO-SIDE WELL GAS PASTA COOKER

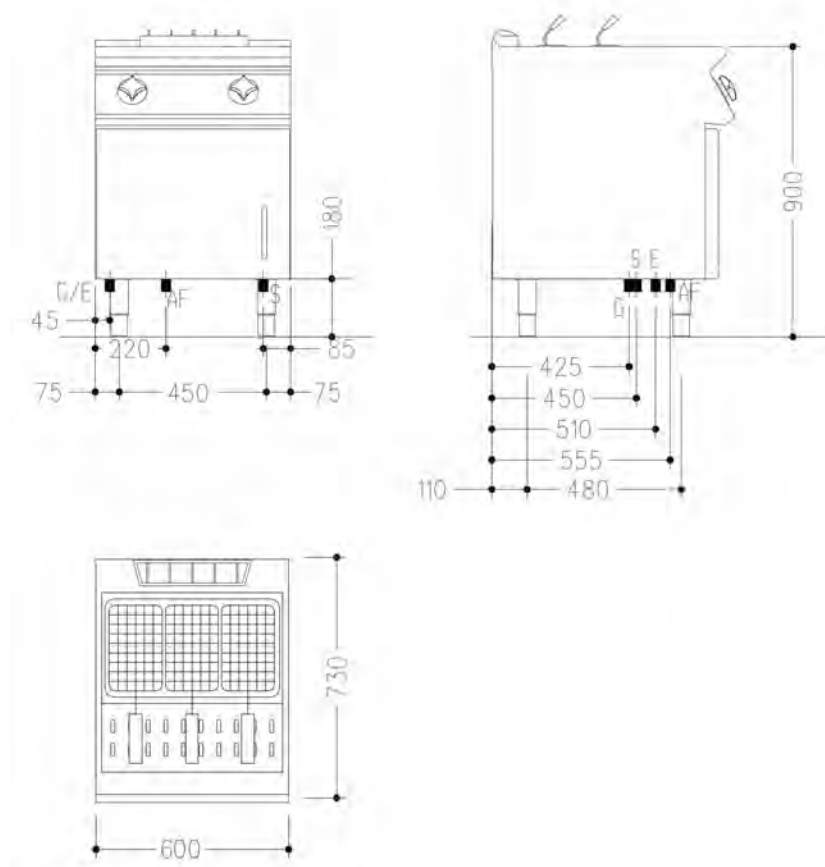

### Legend

(E) Socket 1: Connection supply terminal floor level (+100mm). Spare cable 1500mm

(E) Socket 2:

(G) Gas: Ø1/2"- H=200mm

(AD) Softened water:

(AF) Cold water: Ø1/2"-H=200mm

(AC) Hot water:

(S) Draining: Ø1"-H=200mm

(FR) In e out freon:

(V) Steam: